
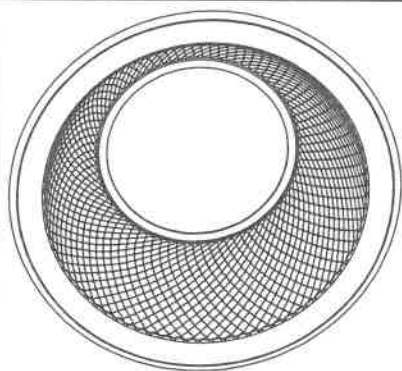



	D 1	D 2	H	R	A / B
D 150	186	148	82	160	500
D 200	236	196	100	210	

1




		ON	ON	ON	ON	ON	ON	ON	ON
		1 2 3	1 2 3	1 2 3	1 2 3	1 2 3	1 2 3	1 2 3	1 2 3
D150	mA	150	200	250	300	350	400	450	500
	lm	25%	50%	75%	100%	⚠	⚠	⚠	⚠
D200	mA	150	200	250	300	350	400	450	500
	lm	30%	40%	50%	60%	70%	80%	90%	100%


OPTIE A




OPTIE B






2



3

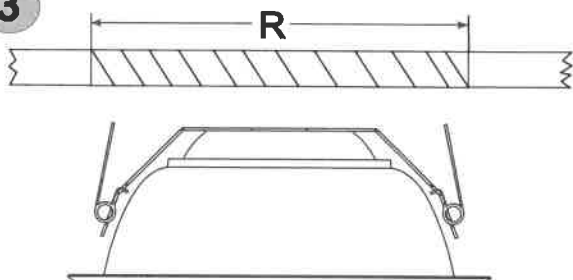

4

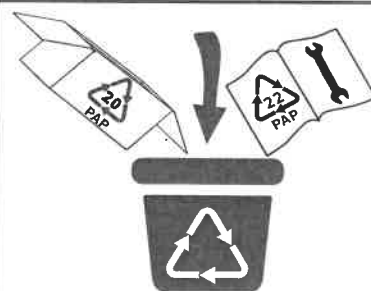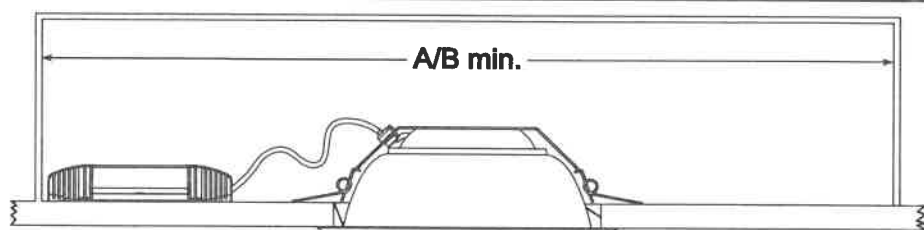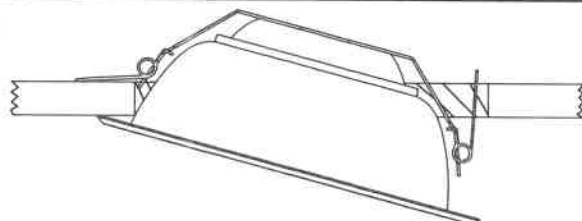

Het armatuur mag uitsluitend worden geïnstalleerd door een bevoegd elektrotechnisch installateur conform de geldende richtlijnen en voorschriften.

Het is niet toegestaan het armatuur onder spanning te plaatsen.

Armatuur en driver mogen niet afgedekt worden (met isolatiemateriaal).

De lichtbron van dit armatuur is niet vervangbaar.

Wanneer de lichtbron het einde van zijn levensduur heeft bereikt, dient het gehele armatuur te worden vervangen.

